





# 2021 USRA LIMITED MOD BODY

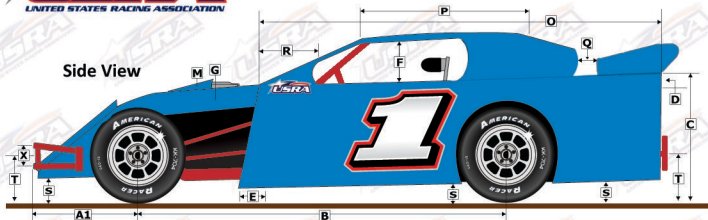


Side View

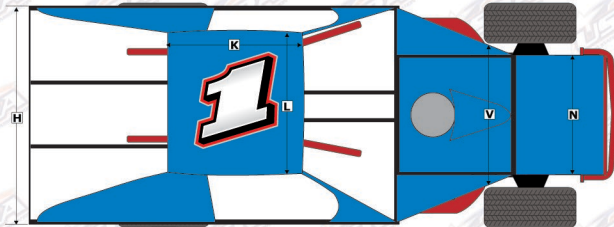

Top View

- A. Maximum 36".
- B. Maximum 109" and minimum 107".
- C. Maximum 41" and minimum 28".
- D. Maximum 6" interior slope; Top of interior must be flush with doors and quarter panels.
- E. Maximum 6" past block, measured at bottom on both sides.
- F. Maximum 18" and minimum 12" both sides.
- G. Maximum 5" drop on sides, sealed from cockpit.
- H. Maximum 67" and minimum 55" (must be same front to rear), measured at top of interior deck.
- K. Maximum 53" and minimum 32".
- L. Maximum 53" and minimum 32" (includes sides).
- M. Maximum 6" tall.
- N. Maximum 42" (must be flat and flush with sides).
- O. Maximum 121" and minimum 98".
- P. Maximum 2" clearance at rear of roof and 5" at top front (using level).
- Q. Minimum 3".
- R. Maximum 19" (same both sides).
- S. Maximum 3" from ground at all points.
- T. Maximum 24" and minimum 16" center of front and rear bumpers from ground.
- V. Maximum 67" and minimum 24" (must cover radiator).
- X. Minimum 6.5" from center of top to center of bottom.

Sail Panels

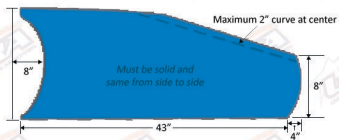

Spoiler Braces

