





2022 USRA STOCK CAR BODY

Side View

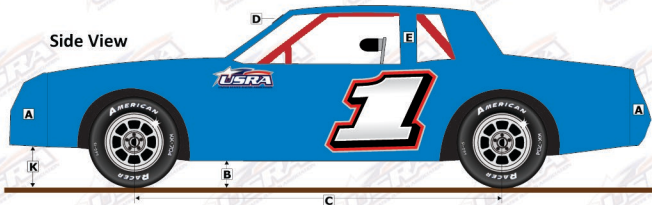

Top View

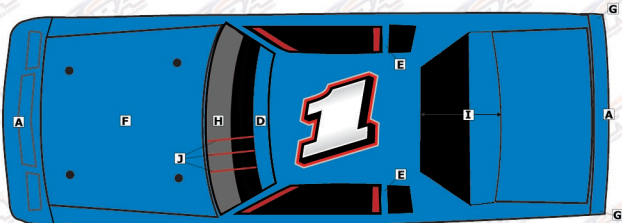

- A. Stock appearing plastic nose pieces and tail pieces are permitted.
- B. Minimum 4" from ground to body. Back of rear tail piece and rear of deck lid may be a maximum of 20" above center of bumper and frame rails.
- C. Minimum 107.5" on both sides with no more than 1" difference from side to side.
- D. Maximum 7" tall metal sun visor may be added to top of windshield opening. Roof and window openings must remain stock dimensions and slope.
- E. B-pillars may be trimmed to a minimum 2".
- F. Stock steel or aluminum hoods only (gutting permitted).
- G. Bumpers must be capped to the body if not inside of nose piece or tail piece.
- H. 36" from back of engine block.
- I. Speaker deck may extend from trunk deck to rear of racing seat, but no higher than opera windows.
- J. Minimum of three (3) windshield bars must be in place in front of driver.
- K. Minimum height 6".